


LIGNUM BK-103

STAIN REMOVER FOR TANNIN REMOVAL FROM WOOD

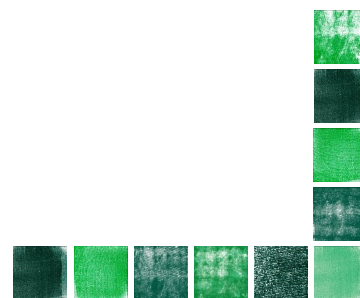

PRODUCT DESCRIPTION

Lignum BK-103 is a water-based stain remover suitable for removing tannin, rust and other processing marks from wooden surfaces, particularly oak and chestnut.

RECOMMENDED USE

The product is suitable for ALL TYPES OF WOOD* **for both indoor and outdoor use**, particularly hardwoods such as oak and chestnut.

*It is not recommended for use on already impregnated or varnished surfaces.

COVERAGE

Coverage may vary depending on the extent of the stains and the removal required. It is always recommended to perform a preliminary test before use.

CHARACTERISTICS

- It removes stains **without raising the wood grain**.
- Effective even on **tannin activated by water-based adhesives**.
- **Easy and quick** to apply.

BEFORE APPLICATION

- **Tools** must be **clean** (free of impurities or residues from other products) **and dry**.
- It is always recommended to conduct a preliminary test before use.

TOOLS

Brush, sponge, cloth.

METHODS OF APPLICATION

- The product is **ready to use** and it must not be diluted.
- **Shake well** before use.
- **Apply** the product to the stains and leave it to act for a few minutes (between 5 and 30 minutes, depending on the severity of the stains).
- Completely remove the product with a damp sponge or cloth.
- Repeat the application, if necessary.

IMPORTANT

- Use the product at temperatures between +10 °C e +30 °C. Lignum BK-103 is a water-based product: **protect it from freezing!**
- Avoid using the product on already impregnated or varnished surfaces as it may be ineffective and could damage the treatment. In case of doubt, contact our Technical Department.
- Wear gloves, goggles and protective clothing during use.

CLEANING OF TOOLS

Clean with clean water immediately after use.

STORAGE PRODUCT

Store the product in its original, tightly sealed container in a cool, ventilated place away from heat sources. The product is frost sensitive! Storage temperature: between +5 °C and +30 °C. **Shelf life:** 24 months from the production date (see batch number on the packaging).

TECHNICAL DATA

Aspect: liquid

Colour: colourless

Odour: odourless

Density: 1.01 g/ml

pH (20 °C): 3.4

Solubility: soluble in water


Boiling point: approximately 100 °C

PACK SIZES

- 1-litre bottle (sales box of 12 units)
- 5-litre plastic jerrycan (sales box of 4 units)
- 20-litre plastic jerrycan (pallet of 24 units)
- 200-litre metal drum (pallet of 2 units)

Transport packaging is conditioned on eco-sustainable pallets, certified for wood sourced from PEFC sustainably managed forests.

LIGNUM[®] BK-103

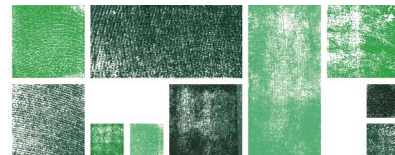

LABELING

Warning

Attention



Hazard Statements

Causes serious eye irritation. Causes skin irritation.

Precautionary statements

Keep out of reach of children. In case of medical consultation, keep the container or product label available. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing. Wear protective gloves and protect eyes/face. If eye irritation persists, consult a doctor. Wash hands thoroughly after use.

Composition Reg. EC 648/2004

<5% oxalic acid, sodium hydroxide.



Manufactured by HDG Group S.r.l.

Viale Grazia Cavanna, 3 Loc. SISSA
43018 SISSA TRECASALI (PR) ITALY
Tel. +39 0521379085 - www.hdg.it