


PLYWOOD BEAMS
MATCHBOARD
PLYWOOD PANELS

COVERAGE

Variable depending on cavities to be filled.

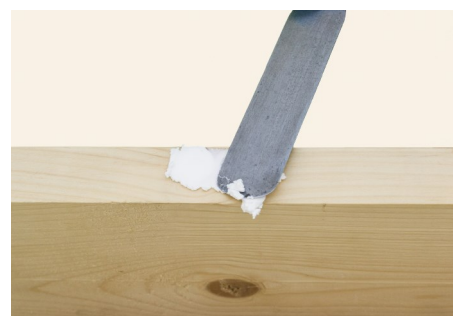

TYPICAL USE

- ➔ **Wood filler** in a very light paste of fillers and acrylic binder.
- ➔ Ideal for **filling holes and cracks** in carpentry wood.

BENEFITS

- ➔ **Does not shrink, crack or retract.** Remains elastic.
- ➔ **Does not yellow or leave halos.**
- ➔ **Can be painted as soon as it dries.**
- ➔ **Can be coloured** with universal dyes.
- ➔ Does not require pretreatment.
- ➔ **Easy to use.**

APPLICATION METHOD

This product is **ready to use**.

Before applying:

- ➔ The **surfaces** to be treated must be perfectly **clean and dry**.
- ➔ The **tools** must be **clean and dry**.
- ➔ If the product is too dry, add a few drops of water and mix.

Tools to be used:

Trowel.

How to apply the product:

- ➔ Apply in one or more passes, pressing well and levelling (surface depths ranging from 0.5 to 3 cm give the best results).
- ➔ If evenly smoothed with the trowel, sanding or levelling is not needed.

Drying speed of the product:

In a ventilated area, at about 20°C, it usually takes between 15 and 30

minutes to dry. In any case, the surface must be dry before proceeding with the subsequent water treatment. Wait 36 hours when solvent-based products are used.

Tool cleaning:

To remove product residues, just wash the instruments with water. Dry product residues can easily be detached without washing.

HDG Group S.r.l.

Viale Giuseppe Verdi, 3 Loc. SISSA
43018 SISSA TRECASALI (PR) ITALY
Ph. +39 0521379085
Fax +39 0521877338
www.hdg.it

WARNINGS

- ➔ Filled wood must not be exposed to the elements during drying, but not even or even after it is dry.
- ➔ If used on wood placed outdoors, it must be protected by at least two coats of paint.
- ➔ Wear gloves and protective clothing when handling the product.

STORAGE

Store the product in its original container, tightly closed, in a cool and ventilated place, away from heat sources. Storage temperature: between +5 °C and +30 °C. Validity: 36 months from production (see batch on the packaging).

LABELLING

No hazard statement.

Precautionary statements

Keep out of reach of children.

PACK SIZE

- ➔ 1-litre can (box contains 12 pieces)

Transport packaging consists of **ECO-SUSTAINABLE PALLETS** (with certification of use of wood sourced from PEFC-certified forests).

TECHNICAL DATA

Appearance: paste

Colour: white

Odour: characteristic, mild

pH: 9.3 (at 20°C)

Density (20°C): 0.25-0.35 g/ml

Solubility: miscible in water