

SUPPORTING STRUCTURES (roofs, walls, etc.)
GARDEN FURNITURE
DOORS AND WINDOWS
FLOORS
WOOD PRODUCTS

COVERAGE

It varies depending on the type of removal to be carried out.



TYPICAL USE

- ➔ **Low-foam water-based alkaline detergent** ideal for **removing the grey patina** from any type of wood surface degraded by light and by the atmospheric agent.
- ➔ **It restores** the original colour of the wood.

BENEFITS

- ➔ **It quickly and easily removes** the grey patina that may appear on aged wood.
- ➔ **It restores** wood's colour.
- ➔ It can be used on **any species of wood**.
- ➔ After using the detergent, **the wood can be treated again**.

APPLICATION METHOD

This product is **ready to use**.

Before applying:

- ➔ The **tools** used must be **clean** (free of impurities or residues of other products).
- ➔ It is advisable to always carry out a **preliminary test** before use.

Tools to be used



Abrasive pad or sponge with an abrasive side (e.g., sponge for washing dishes).

How to apply the product

- ➔ **Spread the product** onto the surface using an abrasive pad or abrasive sponge and rub.
- ➔ **Rinse** with a damp sponge. If the grey patina is particularly thick, it may be necessary to repeat the procedure above.

Tool cleaning

Rinse the tool that was used, with water, to remove detergent residues.

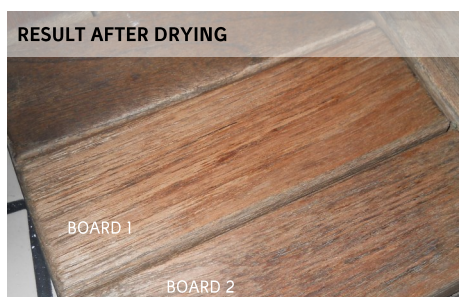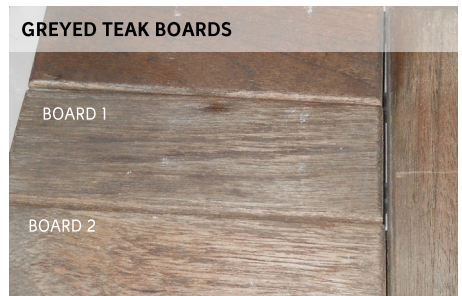

The pictures show an example of using LIGNUM VIVO to restore greyed teak boards (BOARDS 1 AND 2)



The picture shows a greyed spruce matchboard that was first cleaned with LIGNUM VIVO and then treated with LIGNUM P-501 coloured impregnator.

HDG Group S.r.l.

Viale Giuseppe Verdi, 3 Loc. SISSA
43018 SISSA TRECASALI (PR) ITALY
Ph. +39 0521 379085
Fax +39 0521 877338
www.hdg.it

TECHNICAL SPECIFICATIONS

Aspect: liquid
Colour: colourless
Odour: odourless
Density : 1,002 g/ml
pH: 13,40
Solubility in water: miscible
Boiling point: about 100 °C

PACKAGING

- 1-litre PE bottle (box contains 12 pieces)
- 5-litre PE can (box contains 4 pieces)

Transport packaging consists of ECO-SUSTAINABLE PALLETS (with certification of use of wood sourced from PEFC-certified forests).

STORAGE

Store the product in its original container, tightly closed, in a cool and ventilated place, away from heat sources and away from incompatible materials (strong acids, metals). Storage temperature: between +5 °C and +30 °C. Validity: 24 months from production (see batch on the packaging).

WARNINGS

- This product may remove existing surface treatments.
- Use **WITH CAUTION on wood species rich in tannin**: to prevent it from being extracted, it is necessary to leave the product on the surface for only a short time and repeat the operation several times.
- **Do not use** on metals or, in general, on materials other than wood.

LABELLING

Signal word

Danger

Hazard statements

Causes severe skin burns and eye damage.

Precautionary statements

Wear protective gloves/protective clothing/eye protection/face protection. IF IN EYES: rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. IF ON SKIN (or hair): take off immediately all contaminated clothing. Rinse skin with water/shower. IF SWALLOWED: rinse mouth. DO NOT induce vomiting. Immediately call a POISON CENTRE or a doctor. Store locked up.

COMPOSITION (Regulation EC 648/2004)

Less than 5%: non-ionic surfactants, EDTA and salts thereof. Phosphate-free product that contains surfactants with primary and complete biodegradability in compliance with Regulation EC 648/2004.

