


LIGNUM VIVO®

DETERGENT FOR RESTORING GREYING WOOD

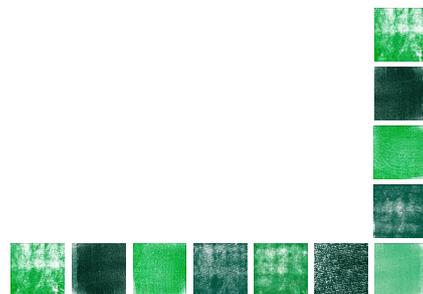

PRODUCT DESCRIPTION

- **Lignum Vivo** is a water-based **detergent**.
- It **removes the grey patina** that forms on aged wood due to exposure to sunlight and weathering, wear, or improper cleaning.
- It **restores** the wood's original colour.

RECOMMENDED USE

Lignum Vivo can be used on all types of wooden surfaces (including bamboo and thermally modified wood)*, **both indoors and outdoors**.

COVERAGE

Coverage varies depending on the degree of greying to be removed and the application method. As a guideline, it ranges from 3 to 12 m²/l.

CHARACTERISTICS

- **Free** from aggressive solvents and phosphates.
- **Does not attack** metals.
- **Low** foaming.
- After use, the wood can be treated again.
- Its **balanced formulation** acts quickly.
- **Easy and fast** to use on any wood species*.
- **Safe** for both the environment and the operator.

BEFORE APPLICATION

- All **tools** used must be **clean** (free from impurities or residues of other products).
- It is always recommended to carry out a preliminary test on a small area of the wood.

TOOLS

Abrasive pad, abrasive sponge, sponge, sprayer, brush, single-disc machine, wet vacuum cleaner, pressure washer.

METHODS OF APPLICATION

- The product is **ready to use**.
- Apply the product to the surface and scrub using the selected tool. Then remove any residues with a damp sponge or a wet vacuum cleaner. Repeat the application if necessary.

- When used on tannin-rich wood species (e.g. chestnut, oak), apply with extreme caution: Lignum Vivo may extract tannins.
- When used on surfaces previously treated with coating products, apply only to the greyed areas that are not coated.
- For specific requirements, please contact our Technical Department.

IMPORTANT

- *Use the product with extreme caution on tannin-rich wood species: Lignum Vivo may extract tannins.
- The product is ineffective if used on varnished or lacquered surfaces.
- Wear gloves, goggles and protective clothing during use.

CLEANING OF TOOLS

Rinse tools thoroughly with clean water after use.

PRODUCT STORAGE

Store the product in its original, tightly sealed container in a cool, well-ventilated place, away from heat sources. Frost sensitive! Storage temperature: +5 °C to +30 °C. Shelf life: 48 months from the date of production (see batch number on the packaging).

TECHNICAL DATA

Appearance: liquid

Colour: transparent, colourless

Density (+20 °C): 1,00 ± 0,01 kg/m³


pH: 11

Solubility: dispersible in water

PACK SIZES

- 1-litre recycled HDPE bottle (sales box of 12 units)
- 5-litre HDPE jerrycan (sales box of 4 units)
- 20-litre HDPE jerrycan (pallet of 48 units)

Transport packaging is conditioned on eco-sustainable pallets, certified for wood sourced from PEFC sustainably managed forests.

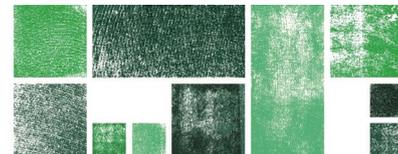

LABELLING

No signal words

No hazard statements

Precautionary statements

Keep out of reach of children.

Composition EC Reg. 648/2004 <5% EDTA and salts. Phosphate-free product, contains surfactants with primary and complete biodegradability in accordance with EC Regulation 648/2004.



Manufactured by HDG Group S.r.l.

Viale Grazia Cavanna, 3
43018 SISSA TRECASALI (PR) ITALY
Tel. +39 05211688200 - www.hdg.it